

BASE AND TRANSPORT PLATES




Profilex s.a.

6b, Z.I. In den Allern
L-9911 Troisvierges
Phone LU : +352 99 89 06
Phone BE : +32 28 88 16 29
Fax : +352 26 95 73 73

info@profilex-systems.com
www.profilex-systems.com

BASE AND TRANSPORT PLATE 30 X 60

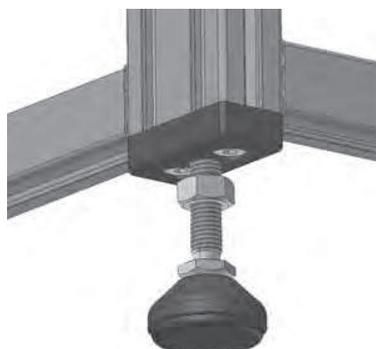

Items supplied

- Aluminium, powder coated, grey
- with fastening kit

Application

- Mounting of adjustable feet on profiles 90 x 32 UL

Assembly

- Connection with fastening kit on profile face

THREAD	THICKNESS	WEIGHT	PART NO.
M8	15 mm	0.085 kg	21.2114/0
M10	15 mm	0.084 kg	21.2115/0
M12	15 mm	0.082 kg	21.2116/0

BASE AND TRANSPORT PLATE 32 X 90



Items supplied

- Aluminium, powder coated, grey
- with fastening kit

Application

- Mounting of adjustable feet on profiles 90 x 32 UL

Assembly

- Connection with fastening kit on profile face

THREAD	THICKNESS	WEIGHT	PART NO.
M8	15 mm	0.164 kg	21.1356/0
M10	15 mm	0.162 kg	21.1357/0
M12	15 mm	0.160 kg	21.1358/0

BASE AND TRANSPORT PLATE 45 X 90



Items supplied

- Aluminium, powder coated, grey
- with fastening kit

Application

- Mounting of adjustable feet on profiles 45 x 90


Assembly

- Connection with fastening kit on profile face

THREAD	THICKNESS	WEIGHT	PART NO.
M10	15 mm	0.164 kg	21.1038/0
M12	15 mm	0.162 kg	21.1039/0
M16	15 mm	0.160 kg	21.1040/0
M20	15 mm	0.156 kg	21.1047/0

BASE AND TRANSPORT PLATES

BASE AND TRANSPORT PLATE 90 X 90

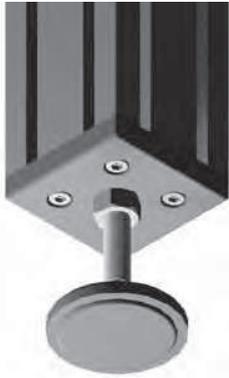

Items supplied

- Aluminium, powder coated, grey
- with fastening kit

Application

- Mounting of adjustable feet on profiles 90 x 90

Assembly

- Connection with fastening kit on profile face

THREAD	THICKNESS	WEIGHT	PART NO.
M10	15 mm	0.332 kg	21.1041/0
M12	15 mm	0.330 kg	21.1042/0
M16	15 mm	0.345 kg	21.1043/0
M20	15 mm	0.290 kg	21.1057/0

BASE AND TRANSPORT PLATE 90 R 90°



Items supplied

- Aluminium, powder coated, grey
- with fastening kit

Application

- Mounting of adjustable feet on profiles 90 R 90°


Assembly

- Connection with fastening kit on profile face

THREAD	THICKNESS	WEIGHT	PART NO.
M10	15 mm	0.277 kg	21.0009/0
M12	15 mm	0.275 kg	21.0010/0
M16	15 mm	0.272 kg	21.0011/0
M20	15 mm	0.268 kg	21.0012/0

FEET

FEET PA

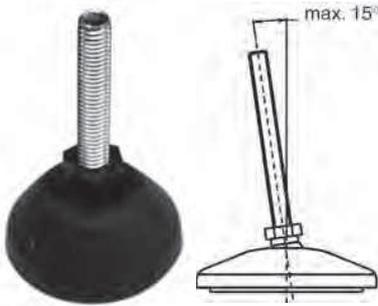

Items supplied


- Plate PA, grey
- Anti skid insert NBR
- Threaded bolt, steel, zinc plated
- Locknut, steel, zinc plated
- All bolts are suitable for all plates

Application

- Levelling of machine bases or constructions
- Boards, partitions, enclosures
- Tables, conveyors and work stations

Assembly


- Directly on core boring of profiles, reborable up to M12
- On larger threads use base and transport plate
- For profiles 45 x 90 und 90 x 90 a base and transport plate is required, if the feet are to be positioned centrally.

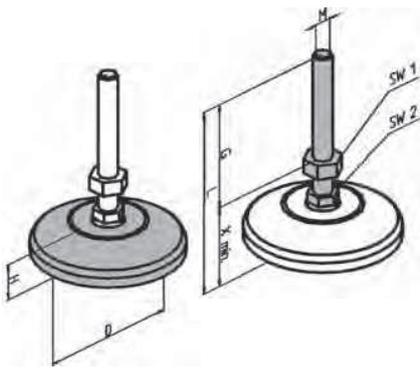

THREADED BOLT	PLATE			
	Ø 30	Ø 45	Ø 60	Ø 80
M8	21.1851/0	21.1871/0	21.1881/0	21.1891/0
M10	21.1852/0	21.1872/0	21.1882/0	21.1892/0
M12	-	21.1873/0	21.1883/0	21.1893/0
M16	-	21.1874/0	21.1884/0	21.1894/0

PLATE			THREADED BOLT					
D mm	H mm	max. load	M	G	X	SW1	SW2	L
30	20	300 kg	8	33,5	38.5	13	14	72,5
45	20	500 kg	10	42	40.5	17	14	82,5
60	20	1000 kg	12	90	42.5	19	14	132,5
80	20	1000 kg	16	107	45.5	24	17	152,5

FEET PA WITH ATTACHMENT BORES




Items supplied

- Plate PA, grey
- Anti skid insert NBR
- Threaded bolt, steel, zinc plated
- Locknut, steel, zinc plated
- Feet with load 1800 kg are supplied without anti skid insert NBR

PART NO.	COLOUR	M	G	X	SW1	SW2	L	E	F	D	MAX. LOAD
21.1846/0	grey	10	82	40	17	14	122	74	Ø9	100	1000 kg
21.1847/0	grey	12	140	42	19	14	182	74	Ø9	100	1000 kg
21.1848/0	grey	16	137	45	24	17	182	74	Ø9	100	1000 kg

FEET

FEET PA

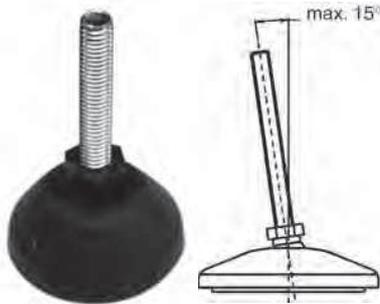

Items supplied


- Plate PA, grey
- Anti skid insert NBR
- Threaded bolt, steel, zinc plated
- Locknut, steel, zinc plated
- All bolts are suitable for all plates

Application

- Levelling of machine bases or constructions
- Boards, partitions, enclosures
- Tables, conveyors and work stations

Assembly


- Directly on core boring of profiles, reborable up to M12
- On larger threads use base and transportplate
- For profiles 45 x 90 und 90 x 90 a base and transport plate is required, if the feet are to be positioned centrally.

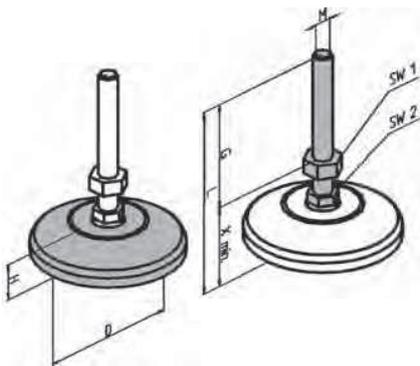

THREADED BOLT	PLATE			
	Ø 30	Ø 45	Ø 60	Ø 80
M8	21.1851/0	21.1871/0	21.1881/0	21.1891/0
M10	21.1852/0	21.1872/0	21.1882/0	21.1892/0
M12	-	21.1873/0	21.1883/0	21.1893/0
M16	-	21.1874/0	21.1884/0	21.1894/0

PLATE			THREADED BOLT					
D mm	H mm	max. load	M	G	X	SW1	SW2	L
30	20	300 kg	8	33,5	38.5	13	14	72,5
45	20	500 kg	10	42	40.5	17	14	82,5
60	20	1000 kg	12	90	42.5	19	14	132,5
80	20	1000 kg	16	107	45.5	24	17	152,5

FEET PA WITH ATTACHMENT BORES





Items supplied

- Plate PA, grey
- Anti skid insert NBR
- Threaded bolt, steel, zinc plated
- Locknut, steel, zinc plated
- Feet with load 1800 kg are supplied without anti skid insert NBR

part no.	COLOUR	M	G	X	SW1	SW2	L	E	F	D	max. load
21.1846/0	grey	10	82	40	17	14	122	74	Ø9	100	1000 kg
21.1847/0	grey	12	140	42	19	14	182	74	Ø9	100	1000 kg
21.1848/0	grey	16	137	45	24	17	182	74	Ø9	100	1000 kg

FURNITURE WHEEL WITH LOCKING DEVICE

part no. 21.1153/0

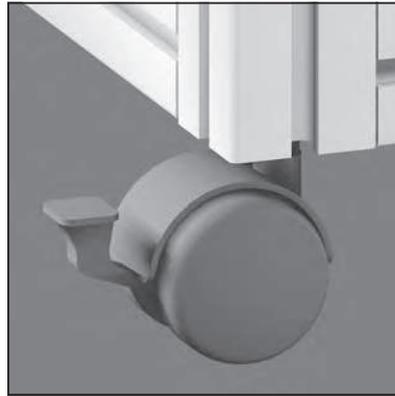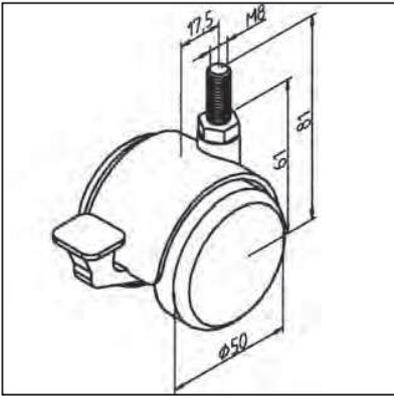

TECHN. DATA / ITEMS SUPPLIED

- Housing, polyamide, black
- Double wheel, polyamide, black with slide bearing
- Fastening kit
- Weight 0,080 kg
- Load max. 30 kg

APPLICATIONS



- Light movable tables
- Movable file box
- Office furniture, Tool boxes

ASSEMBLY

- Directly on central bore of the vertical profile
- If wheel is to be positioned centrally, for profiles 45 x 90 or bigger, a base plate with thread M8 is required

FURNITURE WHEEL WITHOUT LOCKING DEVICE

part no. 21.1105/0

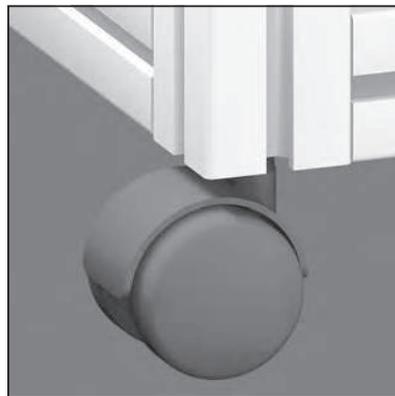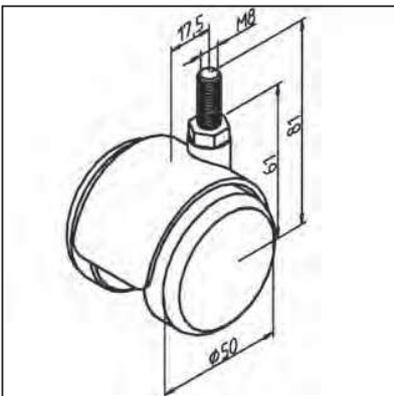

TECHN. DATA / ITEMS SUPPLIED

- Housing, polyamide, black
- Double wheel, polyamide, black with slide bearing
- Fastening kit
- Weight 0,076 kg
- Load max. 30 kg

APPLICATIONS



- Light movable tables
- Movable file box
- Office furniture, Tool boxes

ASSEMBLY

- Directly on central bore of the vertical profile
- If wheel is to be positioned centrally, for profiles 45 x 90 or bigger, a base plate with thread M8 is required

WHEEL SWIVEL TYPE WITH BRAKE D 75 X 100

part no. 21.1120/0

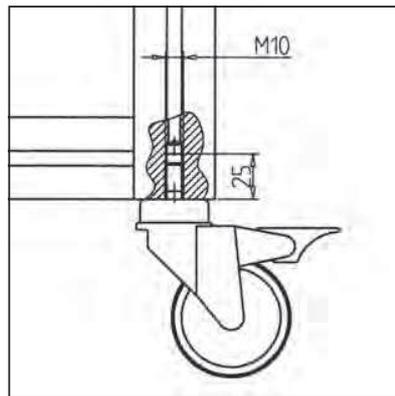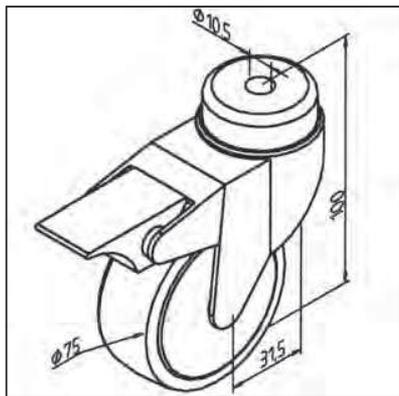

TECHN. DATA / ITEMS SUPPLIED

- Steel, zinc plated
- Tire, rubber, grey
- Fastening kit
- Weight 0,250 kg
- Load max. 50 kg
- Further constructions on demand

APPLICATIONS



- Movable tables
- Material-pillars
- Show cases, etc.

ASSEMBLY

- Directly on central bore of the vertical profile; thread M10 required
- With profiles 45 x 90 or bigger use base plate M10

WHEEL SWIVEL TYPE WITHOUT BRAKE D 75 X 100

part no. 21.1118/0

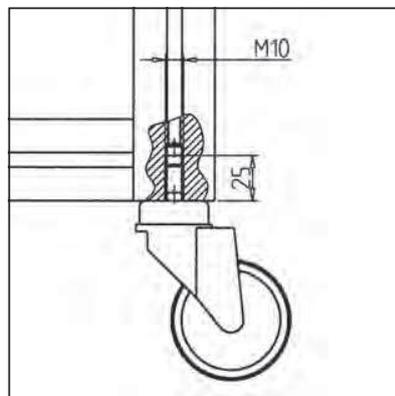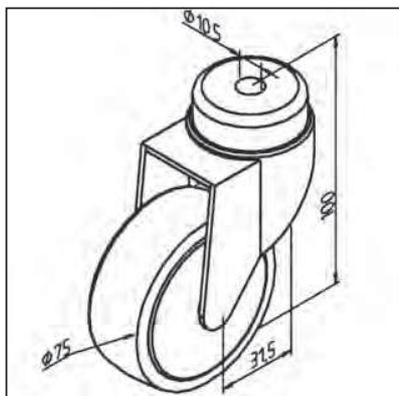

TECHN. DATA / ITEMS SUPPLIED

- Steel, zinc plated
- Tire, rubber, grey
- Fastening kit
- Weight 0,372 kg
- Load max. 50 kg
- Further constructions on demand

APPLICATIONS




- Movable tables
- Material-pillars
- Show cases, etc.

ASSEMBLY

- Directly on central bore of the vertical profile; thread M10 requested
- If the wheel is to be positioned centrally, for profiles 45 x 90 or bigger a base plate is required

WHEEL RIGID TYPE

part no. 21.1475/0

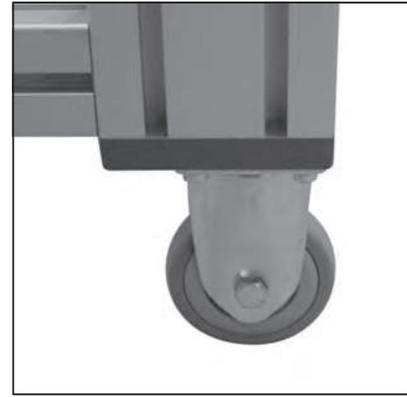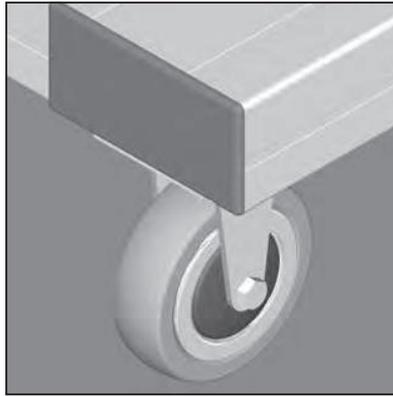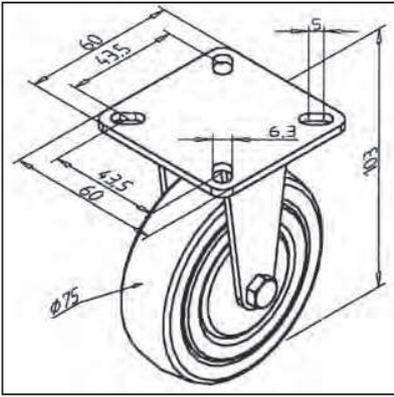

TECHN. DATA / ITEMS SUPPLIED

- Housing, steel
- Tire, rubber, grey
- Fastening kit
- Weight 0,350 kg
- Load max. 50 kg
- Further constructions on demand

APPLICATIONS




- Material-pillars
- Frames
- Movable tables

ASSEMBLY

- With fastening kit from supply schedule directly on profile groove
- With fixing plate for wheel rigid type **part no. 21.1476/0** on profile

BASE AND TRANSPORT PLATE 45 X 45 VA M10

part no. 21.2059/0

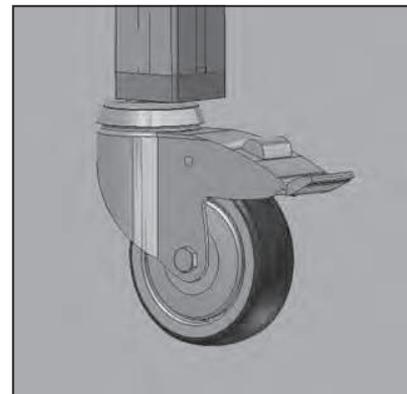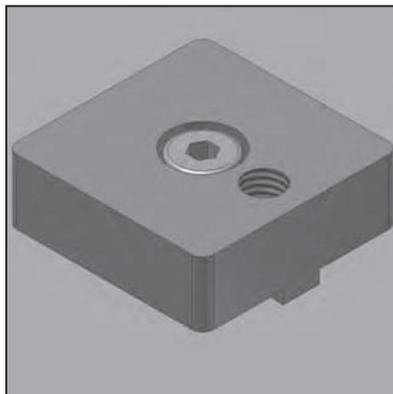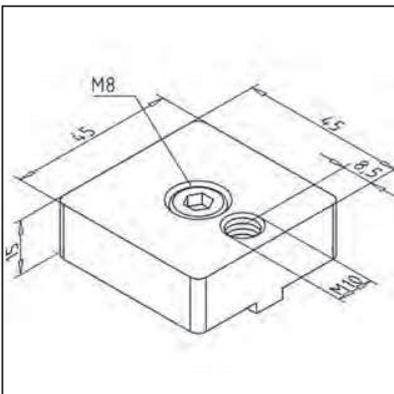

TECHN. DATA / ITEMS SUPPLIED

- Stainless steel
- Fastening kit
- Weight 0,23 kg

APPLICATIONS


- Profile 45 x 45
- Profile 45 x 45 VA
- Height compensation for mounting of swivel wheels in combination with wheels rigid type
- For using feet M10

ASSEMBLY

- Connect with fastening kit on profile face

FIXING PLATE 45 VA FOR WHEEL RIGID TYPE

part no. 21.2058/0

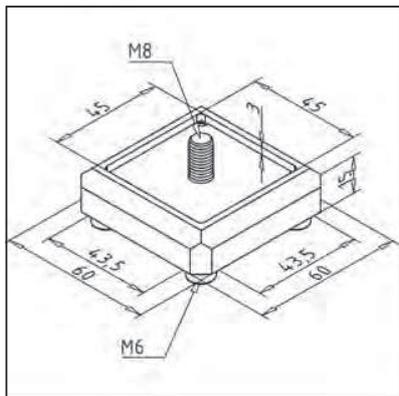

TECHN. DATA / ITEMS SUPPLIED

- Stainless steel
- Fastening kit
- Weight 0,36 kg

APPLICATIONS




- Profile 45 x 45
- Profile 45 x 45 VA
- For fastening of wheel rigid type on profile face 45 x 45 and 45 x 45 VA

ASSEMBLY

- Connect with fastening kit on profile face

FIXING PLATE FOR WHEEL RIGID TYPE

part no. 21.1476/0

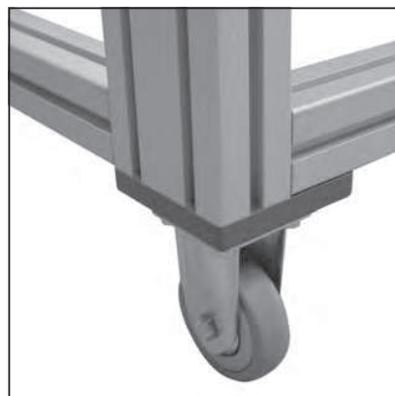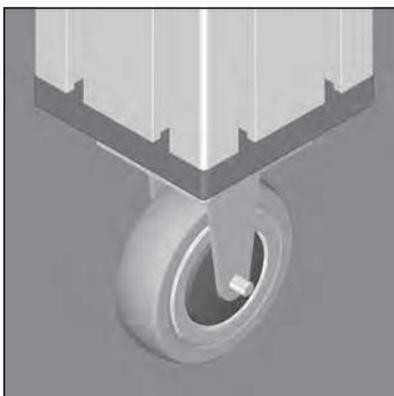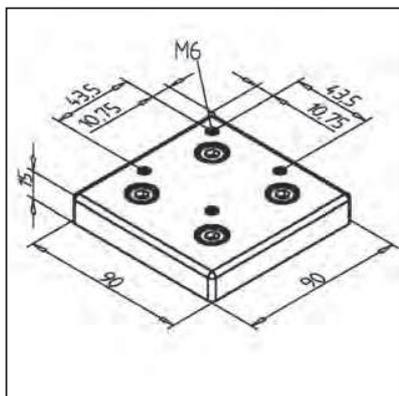

TECHN. DATA / ITEMS SUPPLIED

- Aluminium GD, powder coated, grey
- Fastening kit
- Weight 0,330 kg

APPLICATIONS




- For fastening of wheel Ø 75 x 100 rigid type **part no. 21.1475/0** on profile face 90 x 90

ASSEMBLY

- Use fastening kit

WHEEL SWIVEL TYPE WITH BRAKE D 100 X 131

part no. 21.0031/0

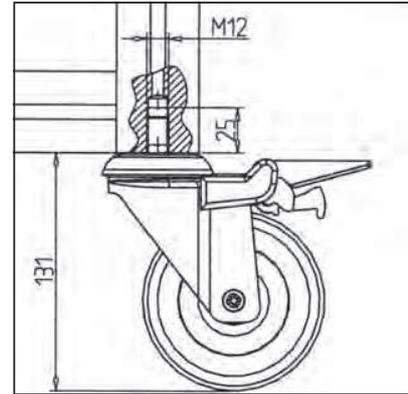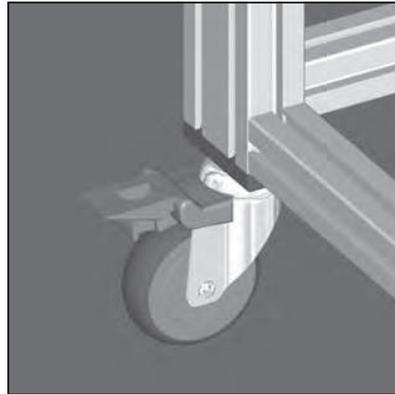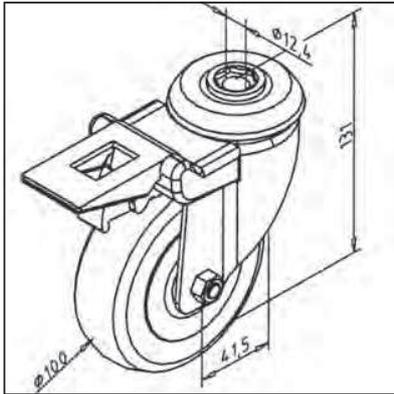

TECHN. DATA / ITEMS SUPPLIED

- Steel, zinc plated
- Tire, rubber
- Fastening kit
- Weight 0,75 kg
- Load max. 100 kg
- Further models on demand

APPLICATIONS




- Movable tables
- Material-pillars
- Show cases, etc.

ASSEMBLY

- Mount directly on central bore of the vertical profile; drill thread M12
- If the wheel is to be positioned centrally, for profiles 45 x 90 or 90 x 90 a base plate is required

WHEEL SWIVEL TYPE WITHOUT BRAKE D 100 X 131

part no. 21.0030/0

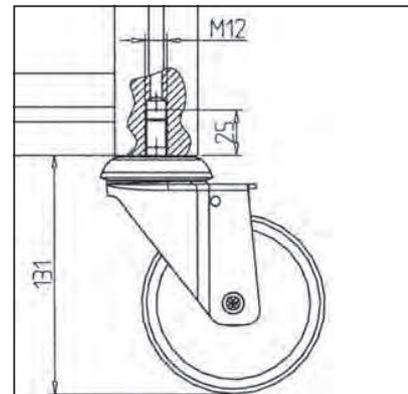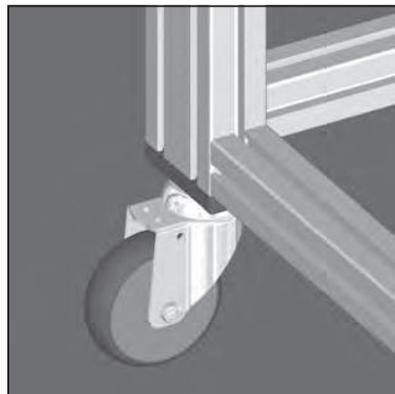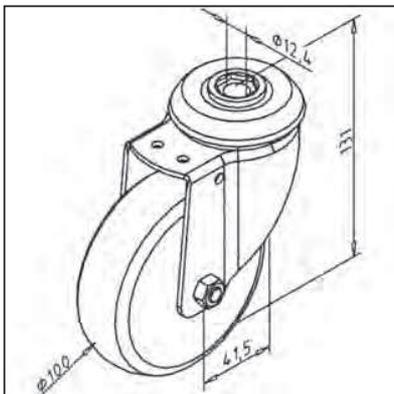

TECHN. DATA / ITEMS SUPPLIED

- Steel, zinc plated
- Tire, rubber
- Fastening kit
- Weight 0,65 kg
- Load max. 100 kg
- Further models on demand

APPLICATIONS



- Movable tables
- Material-pillars
- Show cases, etc.

ASSEMBLY

- Directly on central bore of the vertical profile; thread M10 requested
- If the wheel is to be positioned centrally, for profiles 45 x 90 or 90 x 90 a base plate is required

FLOOR MOUNTING PLATE 45

part no. 21.1730/0

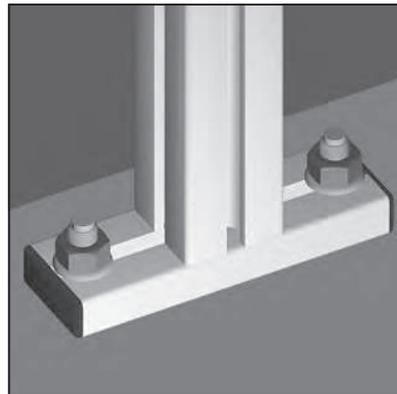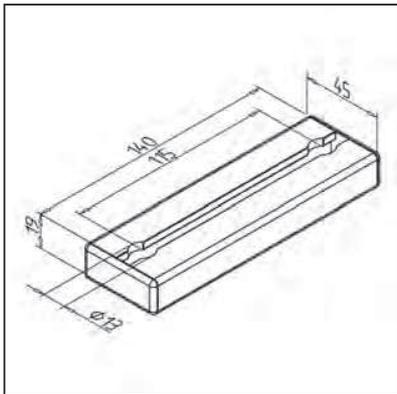

TECHN. DATA / ITEMS SUPPLIED

- Profile 19 x 45
- End caps, grey
- Without fastening kit
- Weight 0,130 kg

APPLICATIONS



- Floor mounting of pillar 45 x 45

ASSEMBLY

- On profile side: MiniTec power-lock fastener
- On floor side: 2 floor anchors **part no. 21.1082/0**

FLOOR MOUNTING PLATE 90

part no. 21.1733/0

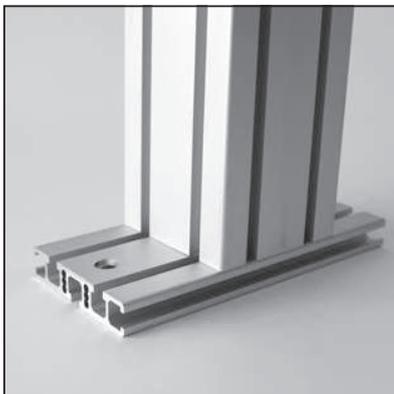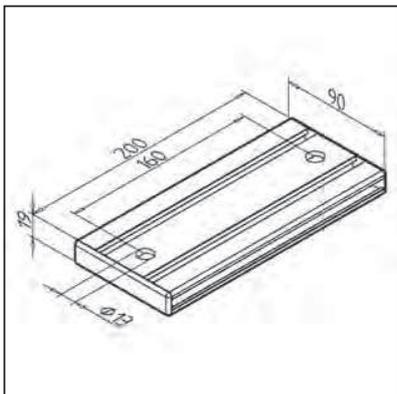

TECHN. DATA / ITEMS SUPPLIED

- Profile 19 x 90
- End caps, grey
- Without fastening kit
- Weight 0,465 kg

APPLICATIONS



- Floor mounting of pillars 45 x 90 or 90 x 90

ASSEMBLY

- On profile side: 2 or 4 MiniTec power-lock fasteners
- On floor side: 2 floor anchors **part no. 21.1082/0**

FLOOR ANCHOR 10

part no. 21.1082/0

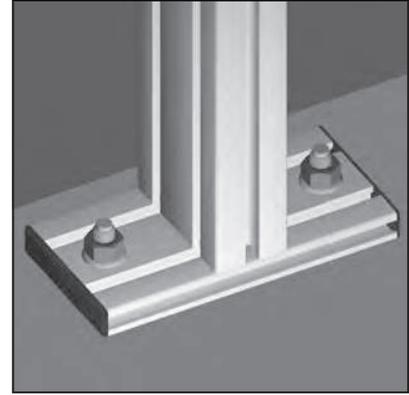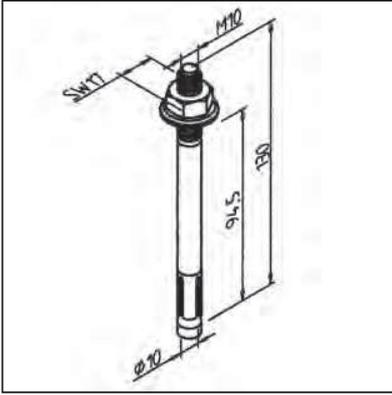

TECHN. DATA / ITEMS SUPPLIED

- Steel, zinc plated
- Ø 10
- Complete with nut and washer
- Weight 0,084 kg

APPLICATIONS


- Attachment of pillars to floor or wall. To be used together with angle bracket for floor fastening, levelling plate or floor mounting plate

ASSEMBLY

- Fit bore in the bottom
- Use floor anchor in connection with angle, levelling plate or floor mounting plate

FLOOR ANCHOR 12

part no. 21.1115/0

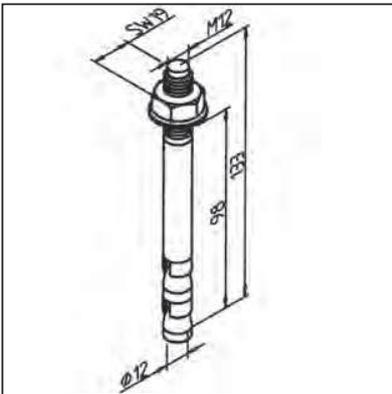

TECHN. DATA / ITEMS SUPPLIED

- Steel, zinc plated
- Ø 12
- Complete with nut and washer
- Weight 0,116 kg

APPLICATIONS




- Attachment of pillars to floor or wall. To be used together with angle bracket for floor fastening, levelling plate or floor mounting plate

ASSEMBLY

- Fit bore in the bottom
- Use floor anchor in connection with angle, levelling plate or floor mounting plate

LEVELLING PLATE 90 ST

part no. 21.0976/0

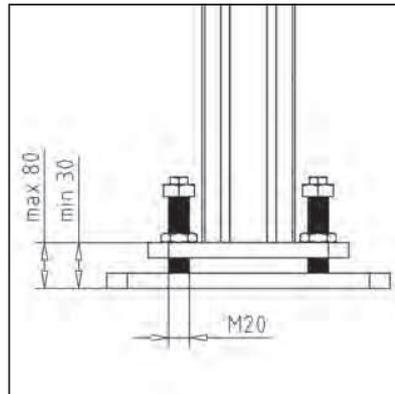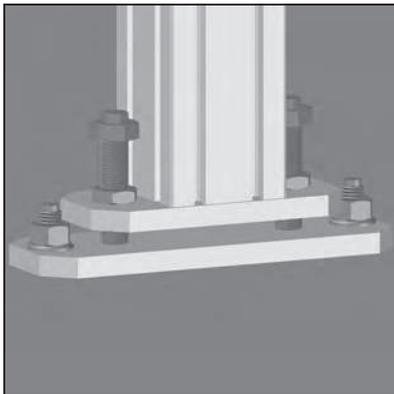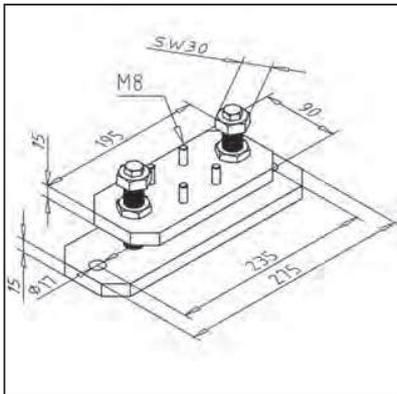

TECHN. DATA / ITEMS SUPPLIED

- Steel, zinc plated
- With fastening kit for profile
- With levelling elements
- Without dowels
- Weight 5,120 kg

APPLICATIONS




- Exact layout of heavy structures with post profile 90x90

ASSEMBLY

- Fasten footplate to the floor using a high performance anchor
- Fasten profile panel to the profile with the fastening kit in the scope of delivery
- Turn the M20 screw to set the height and secure it with the counter nut

LEVELLING PLATE 180 ST

part no. 21.0977/0

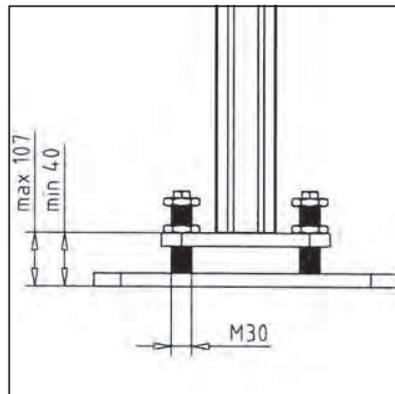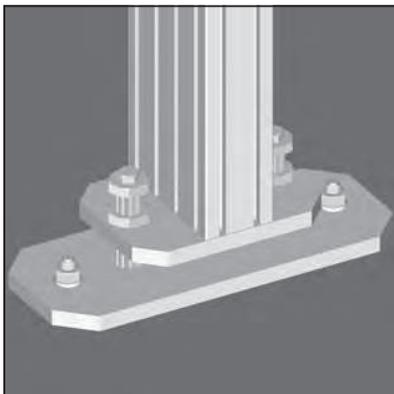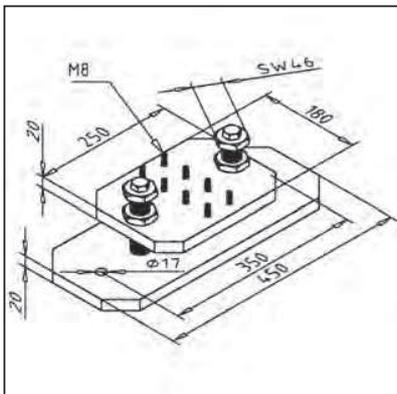

TECHN. DATA / ITEMS SUPPLIED

- Steel, zinc plated
- With fastening kit for profile
- With levelling elements
- Without dowels
- Weight 20,347 kg

APPLICATIONS



- Exact layout of heavy structures with post profile 90x180

ASSEMBLY

- Fasten foot plate to the floor using a high performance anchor
- Fasten profile panel to the profile with the fastening kit
- Turn the M20 screw to set the height and secure it with the counter nut

ANGLE BRACKET FOR FLOOR FASTENING

part no. 21.1112/0

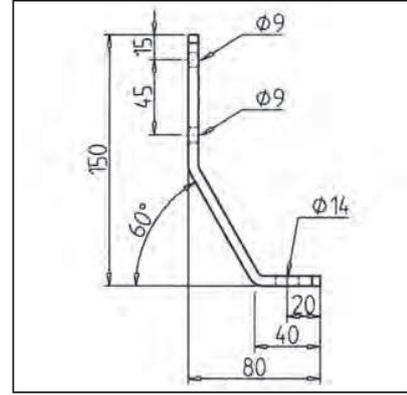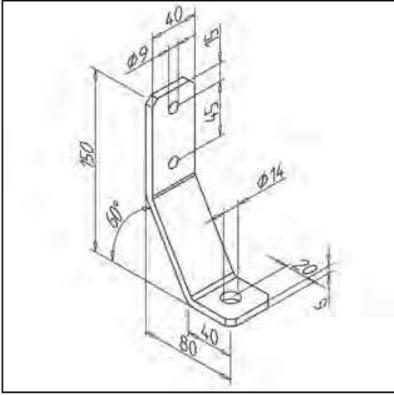

TECHN. DATA / ITEMS SUPPLIED

- Steel, powder coated, grey
- With fastening kit for profile
- Weight 0,360 kg

APPLICATIONS



- Securing and fastening of constructions on floor or wall

ASSEMBLY

- On profile side: Use hex socket cap screws M8 x 20 5 A/F
- On floor side: Use floor anchor 12 **part no. 21.1115/0**
- Also suitable for subsequent mounting

ANGLE BRACKET FOR FLOOR FASTENING

part no. 21.0015/0

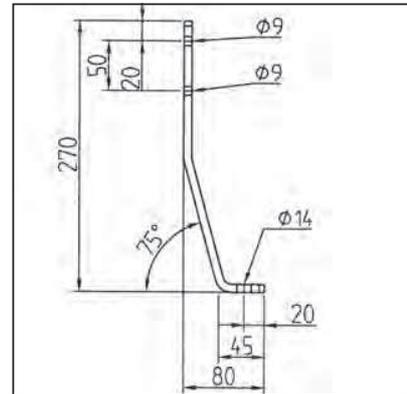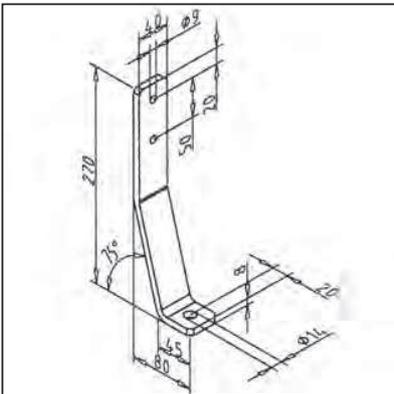

TECHN. DATA / ITEMS SUPPLIED

- Steel, powder coated, grey
- With fastening kit for profile
- Weight 0,757 kg

APPLICATIONS




- Securing and fastening of constructions on floor or wall

ASSEMBLY

- On profile side: Use hex socket cap screws M8 x 20 A/F 5
- On floor side: Use floor anchor 12 **part no. 21.1115/0**
- Also suitable for subsequent mounting

BRACE SOCKET 45 GD

part no. 21.1729/0

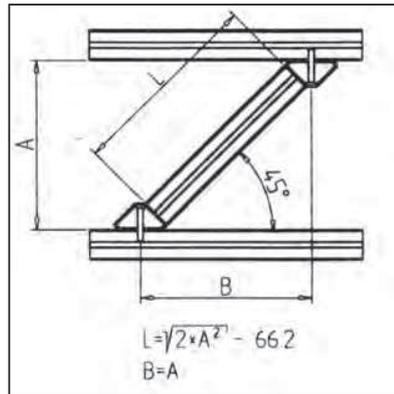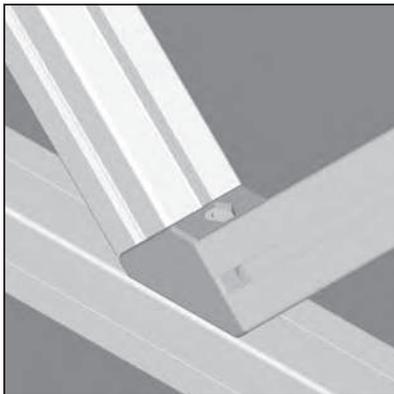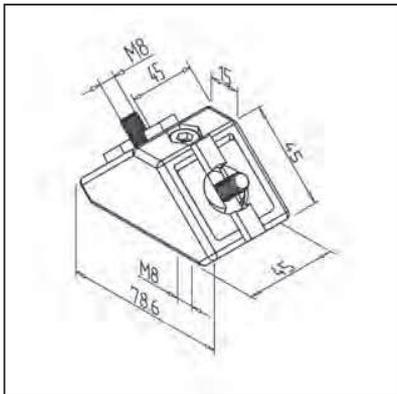

TECHN. DATA / ITEMS SUPPLIED

- GD Zn, powder coated, grey
- Fastening kit
- Weight 0,261 kg

APPLICATIONS



- Support in half-timbered constructions

ASSEMBLY

- Screw brace socket onto the frame
- Insert supports by means of MiniTec power-lock fasteners and tighten

BRACE SOCKET 45° / 90

part no. 21.1727/0

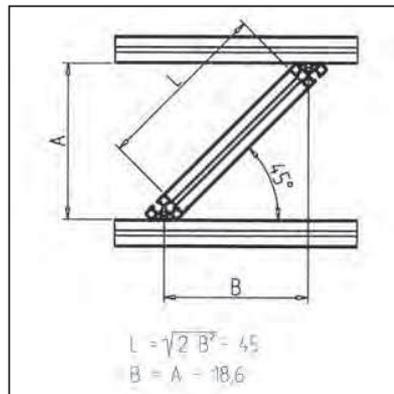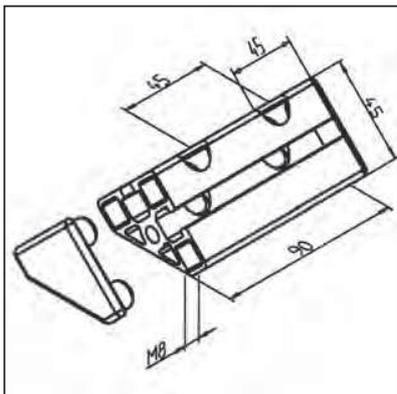

TECHN. DATA / ITEMS SUPPLIED

- Aluminium profile 45 / 45°
- End caps, grey
- Fastening kit
- Weight 0,175 kg

APPLICATIONS



- Support in half-timbered constructions

ASSEMBLY

- Screw brace socket onto the frame
- Insert supports by means of MiniTec power-lock fasteners and tighten
- Fix end caps

BASE AND TRANSPORT PLATE 45 X 45 VA M10

part no. 21.0038/0

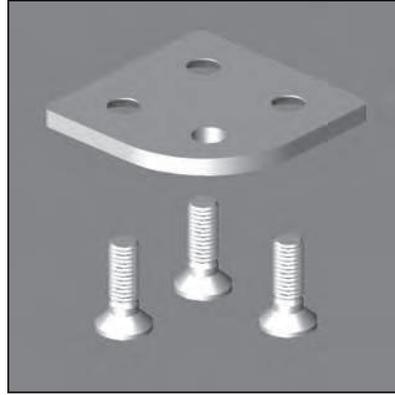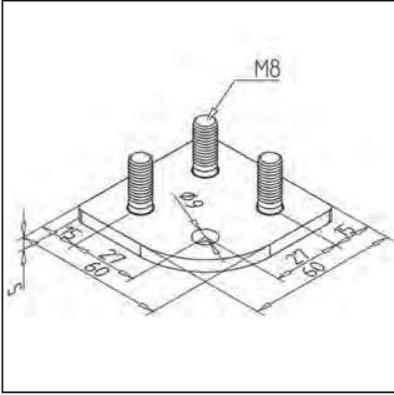

TECHN. DATA / ITEMS SUPPLIED

- Stainless steel
- Fastening kit
- Weight kg

APPLICATIONS




- Profile 45 x 45
- Height compensation for mounting of swivel wheels in combination with wheels rigid type
- For using feet M10

ASSEMBLY

- Connect with fastening kit on profile face

ADAPTER FLANGE 30

part no. 21.2120/0

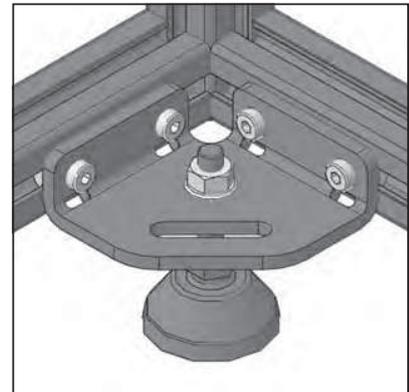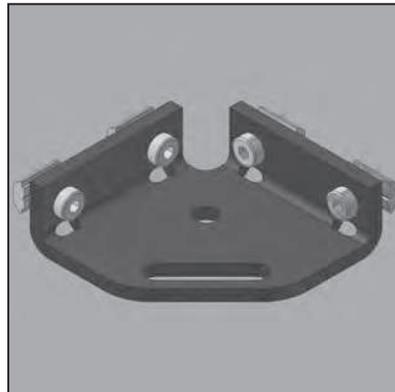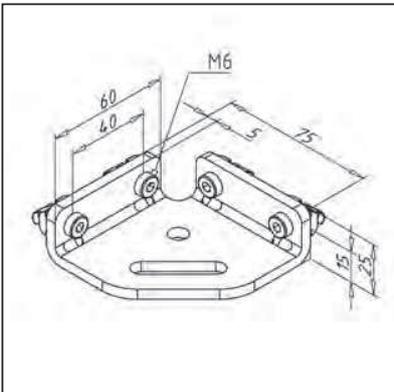

TECHN. DATA / ITEMS SUPPLIED

- Steel, powder coated grey
- Fastening kit
- Weight 0,261 kg

APPLICATIONS



- Strengthening of profile constructions
- Attachment of internal feet or wheels
- Floor mounting and levelling of frames

ASSEMBLY

- Use fastening kit; screw onto profile groove

ADAPTER FLANGE 45

part no. 21.2300/0

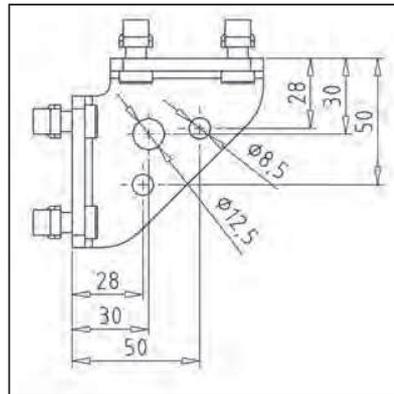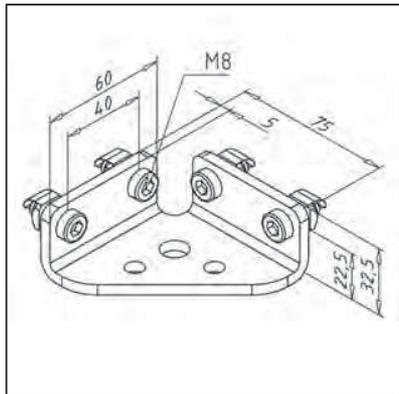

TECHN. DATA / ITEMS SUPPLIED

- Steel, powder coated, grey
- Fastening kit
- Weight 0,311 kg

APPLICATIONS




- Strengthening of profile constructions
- Attachment of internal feet or rollers
- Floor mounting and levelling of frames

ASSEMBLY

- Use fastening kit; screw onto profile groove

CORNER 90

part no. 21.1783/0

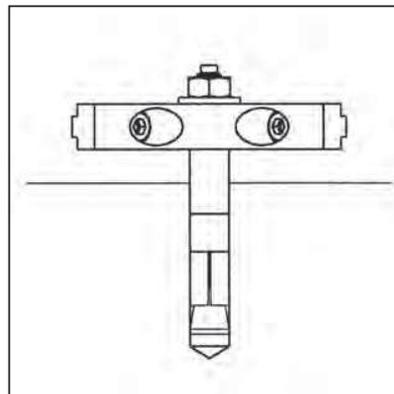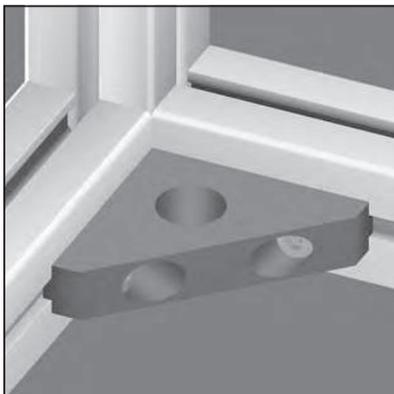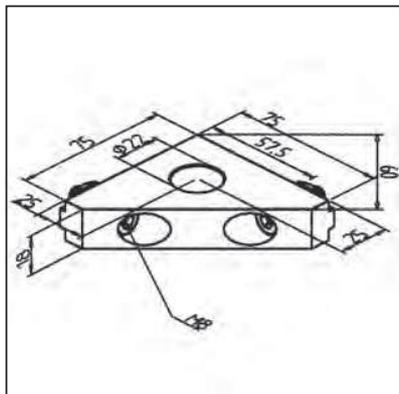

TECHN. DATA / ITEMS SUPPLIED

- Aluminium, natural anodized
- Fastening kit
- Weight 0,170 kg

APPLICATIONS



- Strengthening of constructions
- Attachment of internal feet
- Floor mounting and levelling of frames

ASSEMBLY

- On profile side with fastening kit
- On floor side fasten with floor anchor

CORNER 180

part no. 21.1784/0

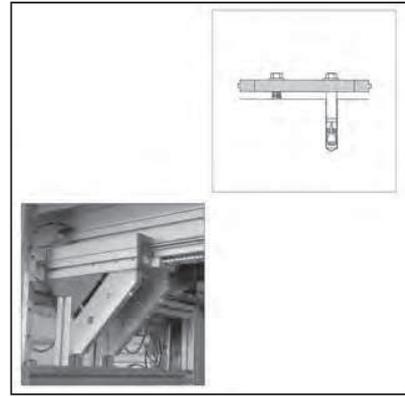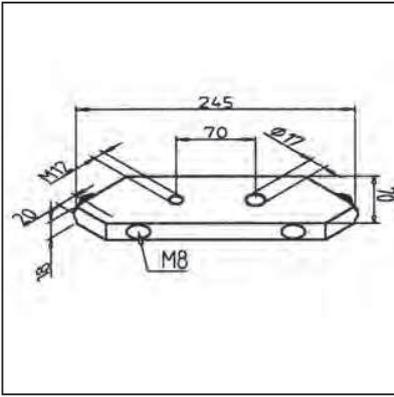

TECHN. DATA / ITEMS SUPPLIED

- Aluminium, natural anodized
- Fastening kit
- Weight 0,690 kg

APPLICATIONS



- Strengthening of heavy constructions
- Attachment of internal feet
- Floor mounting and levelling of frames

ASSEMBLY

- On profile side with fastening kit
- On floor side fasten with floor anchor and levelling screw M 12

STRENGTHENING ELEMENT 30

part no. 21.2110/0

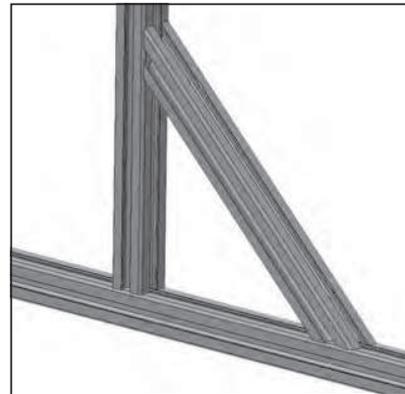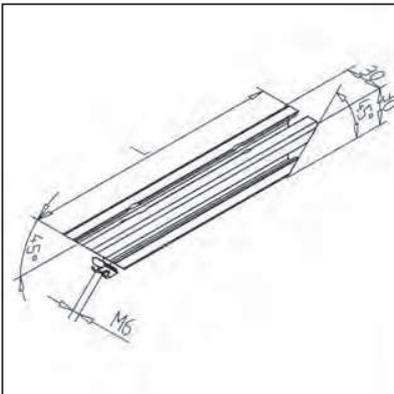

TECHN. DATA / ITEMS SUPPLIED

- Profile 30 x 30, ready for use
- Both ends cut at 45° with counter-bores for fastening kit
- Fastening kit
- Weight 0,213 kg
- Length 300 mm

APPLICATIONS




- Reinforcement of constructions in half-timbered principle

ASSEMBLY

- Screw onto profile groove; use fastening kit

STRENGTHENING ELEMENT 30 X 60

part no. 21.2210/0

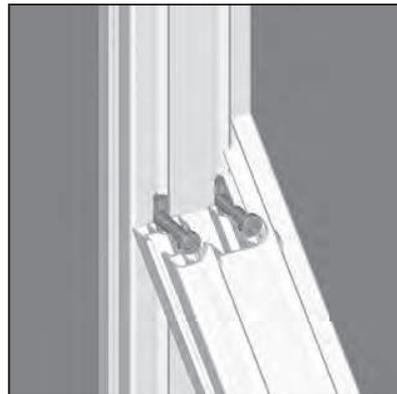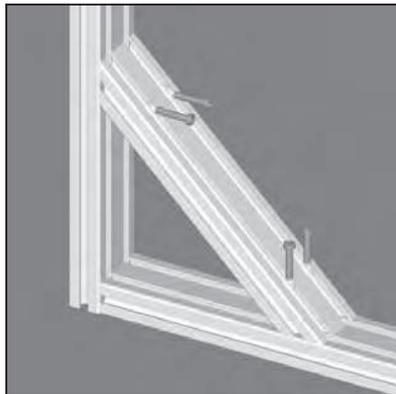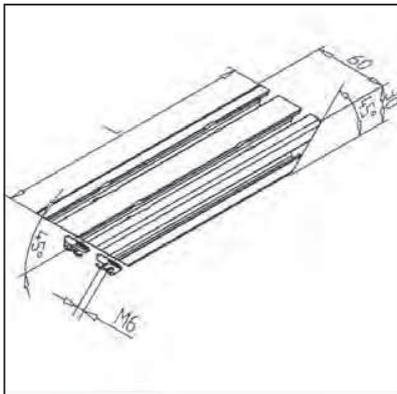

TECHN. DATA / ITEMS SUPPLIED

- Profile 30 x 60, ready for use
- Both ends cut at 45° with counter-bores for fastening kit
- Fastening kit
- Weight 0,338 kg
- Length 300 mm

APPLICATIONS




- Reinforcement of constructions in half-timbered principle

ASSEMBLY

- Screw onto profile groove; use fastening kit

STRENGTHENING ELEMENT 45

part no. 21.1761/0

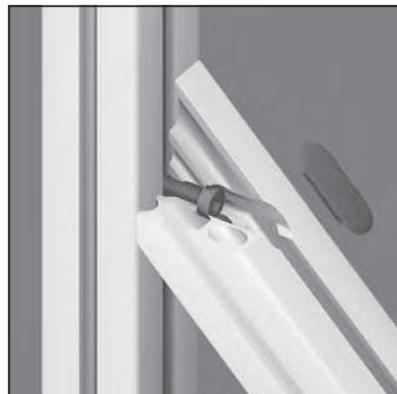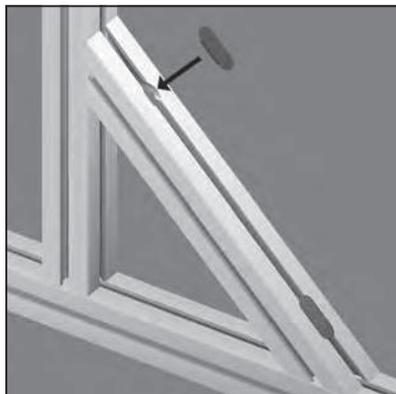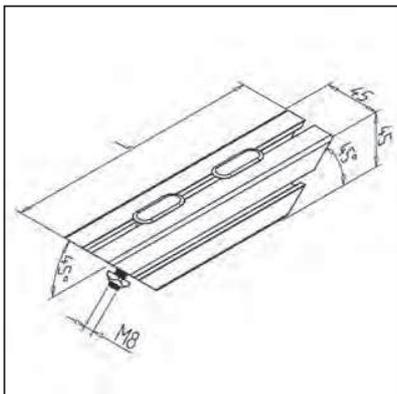

TECHN. DATA / ITEMS SUPPLIED

- Profile 45 x 45, ready for use
- Both ends cut at 45° with counter-bores for fastening kit
- Fastening kit
- Weight 0,870 kg
- Length 360 mm

APPLICATIONS




- Reinforcement of constructions in half-timbered principle

ASSEMBLY

- Screw onto profile groove; use fastening kit

STRENGTHENING ELEMENT 45 VA

part no. 21.1706/0

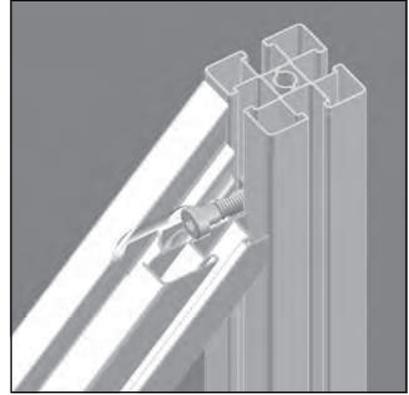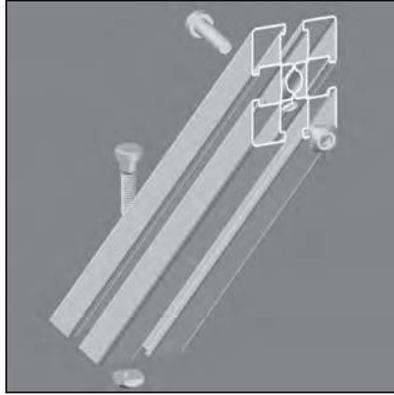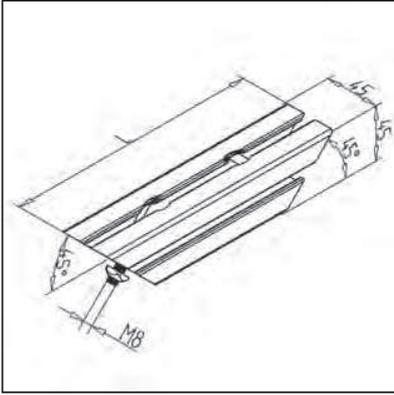

TECHN. DATA / ITEMS SUPPLIED

- Profile 45 x 45, ready for use
- Both ends cut at 45° with counter-bores for fastening kit
- Fastening kit
- Weight 0,890 kg
- Length 360 mm
- Other lengths and profiles on request
- Please specify dimension L

APPLICATIONS


- reinforcement profile construction, half-timbered building

ASSEMBLY

- Screw with fastening kit on profile groove of the frame construction

STRENGTHENING ELEMENT 90

part no. 21.1762/0

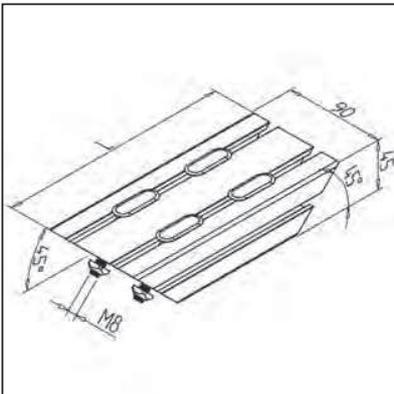

TECHN. DATA / ITEMS SUPPLIED

- Profile 45 x 90, ready for use
- Both ends cut at 45° with 4 counter-bores for fastening kit
- Fastening kit
- Weight 1,416 kg
- Length 360 mm

APPLICATIONS



- Reinforcement of constructions; essentially in half-timbered principle

ASSEMBLY

- Screw onto profile groove, use fastening kit

CANTILEVER FOOT 175

part no. 21.2191/0

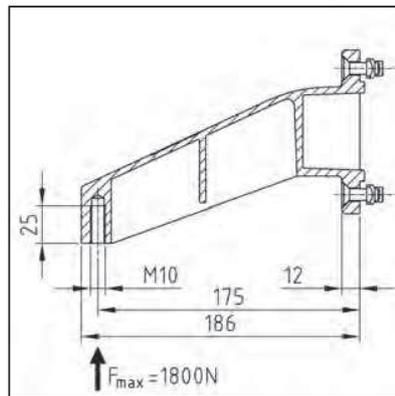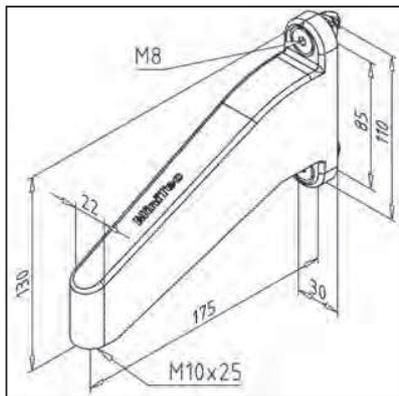

TECHN. DATA / ITEMS SUPPLIED

- Aluminium GD, powder coated, grey
- Fastening kit
- Weight 0,368 kg

APPLICATIONS




- Arrangement of frames and fastening of feet

ASSEMBLY

- Mounting onto profile strut with fastening kit
- Fastening of wheel swivels, feet and screws M10

FOOT 45 GD

part no. 21.1731/0

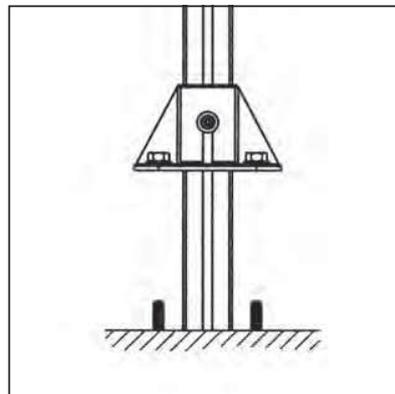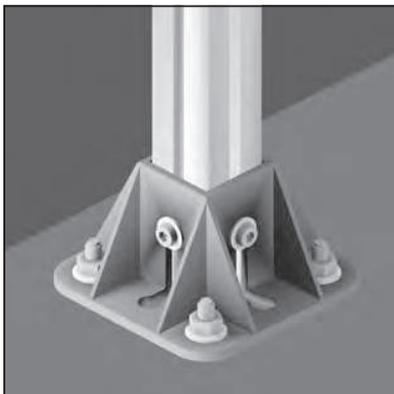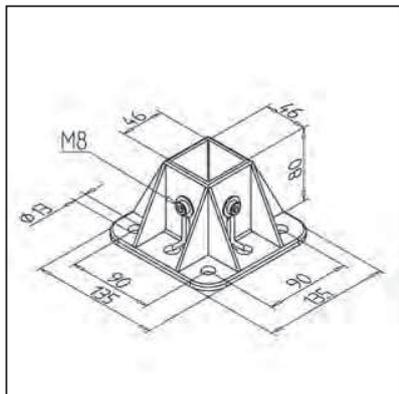

TECHN. DATA / ITEMS SUPPLIED

- Aluminium GD, powder coated, grey
- Fastening kit for profile
- Weight 0,587 kg

APPLICATIONS




- Suitable for profiles up to dimension 45 x 45
- Floor mounting of guard units, information plates and frames
- As connection element for wall attachment

ASSEMBLY

- Insert profile into foot
- Insert the square nut with spring steel sheet into the profile groove; preassemble the screws
- Fix the foot on the floor or on the wall; for this purpose use high-performance anchors or universal dowels with hexagon screws
- Tighten the fastening screws

COVER FOR FOOT 45

part no. 22.1164/0

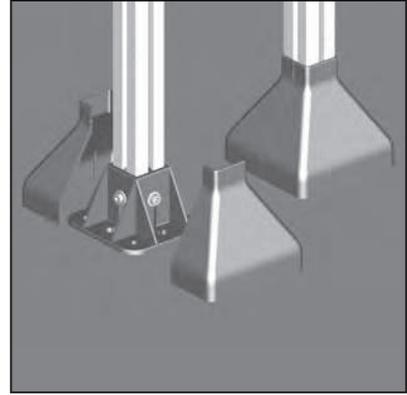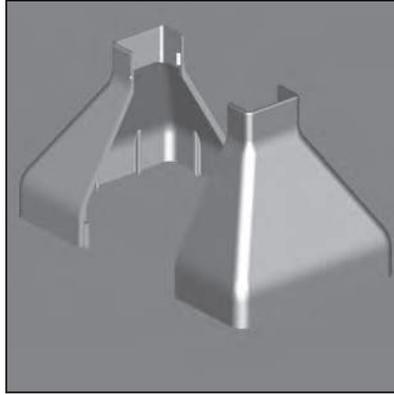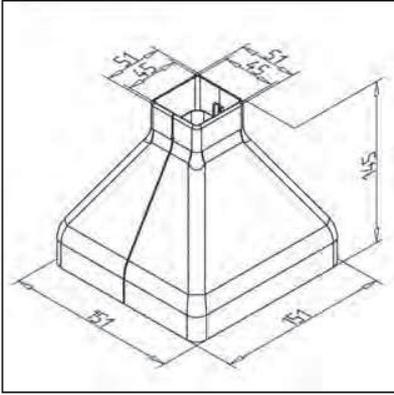

TECHN. DATA / ITEMS SUPPLIED

- Material: ABS, grey
- Weight 0,166 kg

APPLICATIONS



- To cover foot 45 GD 45 and GD open

ASSEMBLY

- Mounting on profile / foot

FOOT 45 GD OPEN

part no. 21.1738/0

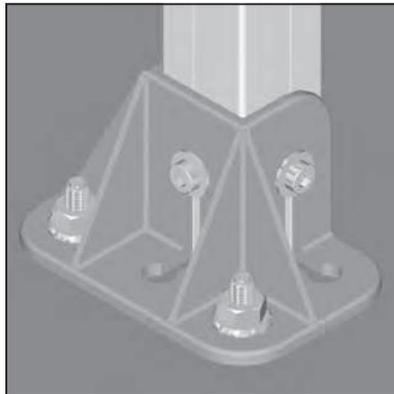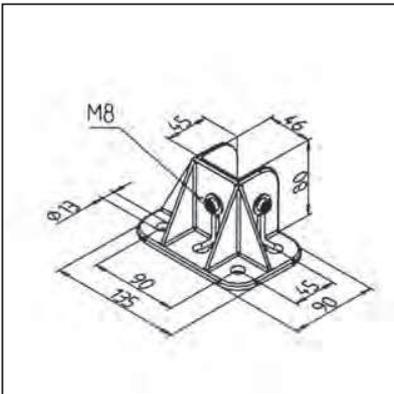

TECHN. DATA / ITEMS SUPPLIED

- Aluminium GD, powder coated, grey
- Fastening kit for profile
- Weight 0,356 kg

APPLICATIONS


- Floor mounting of guard units, information plates and frames
- As connection element for wall attachment; can be used both-sided

ASSEMBLY

- Insert profile into foot
- Insert the square nut with spring steel sheet into the profile groove; preassemble the screws
- Fix the foot on the floor or on the wall; for this purpose use high-performance anchors or universal dowels with hexagon screws
- Tighten the fastening screws

FOOT 45 GD S

part no. 21.1723/0

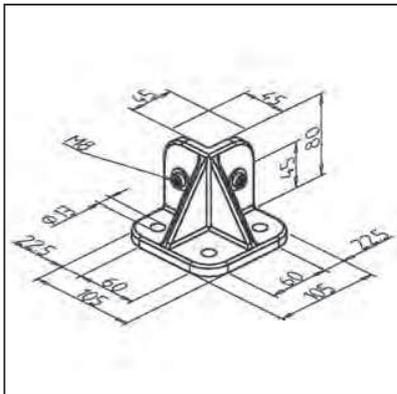

TECHN. DATA / ITEMS SUPPLIED

- Aluminium GD, powder coated, grey
- Fastening kit for profile
- Weight 0,499 kg

APPLICATIONS



- Suitable for all profiles
- Floor mounting of guard units, information plates and frames
- As connection element for wall attachment; can be used both-sided

ASSEMBLY

- Fix the foot on the floor or on the wall; for this purpose use high-performance anchors or universal dowels with hexagon screws
- Tighten the fastening screws

FOOT 90 GD

part no. 21.1737/0

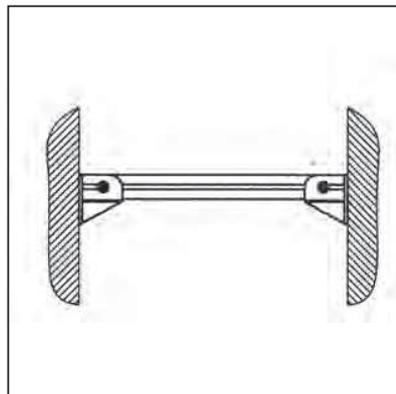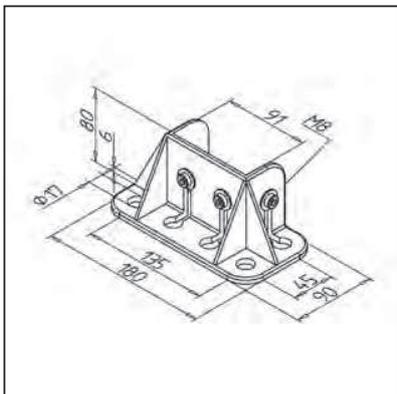

TECHN. DATA / ITEMS SUPPLIED

- Aluminium GD, powder coated, grey
- Fastening kit for profile
- Weight 0,465 kg

APPLICATIONS




- Suitable for profiles up to dimension 45 x 90, 90 x 90 and 90 x 180
- Floor fastening of guard units, information plates and frames
- Connection element for wall attachment; can be used both-sided

ASSEMBLY

- Insert profile into foot
- Insert the square nut with spring steel sheet into the profile groove; preassemble the screws
- Fix the foot on the floor or on the wall; for this purpose use high-performance anchors or universal dowels with hexagon screws
- Tighten the fastening screws

FOOT 90 S

part no. 21.1707/0

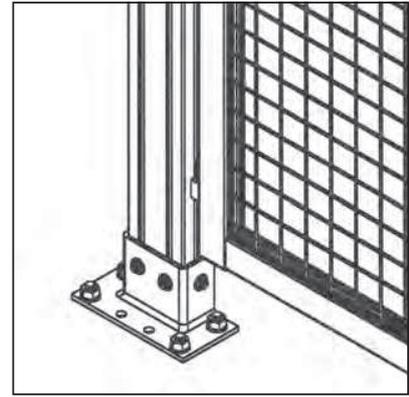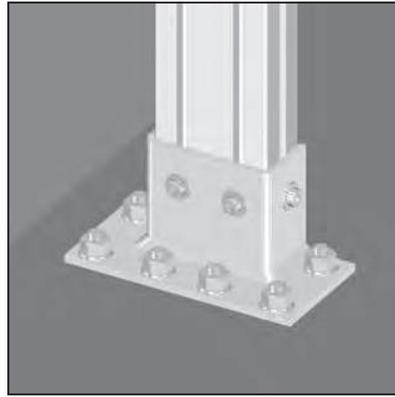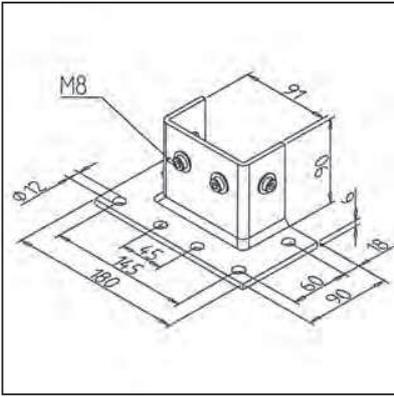

TECHN. DATA / ITEMS SUPPLIED

- Steel, zinc plated
- Fastening kit for profile
- Weight 1,438 kg

APPLICATIONS




- Suitable for profiles up to dimension 45 x 90, 90 x 90 and 90 x 180
- Floor mounting of guard units, information plates and frames
- Connection element for wall attachment; can be used for both sides

ASSEMBLY

- Insert spring-loaded square nuts in profile grooves and slide to fixing position
- Fasten the foot on the floor or on the wall; for floor mounting use high performance anchors 12 mm or universal dowels with hexagon screws M12
- Tighten the screws on profile

COVER FOOT GD

part no. 22.1025/1

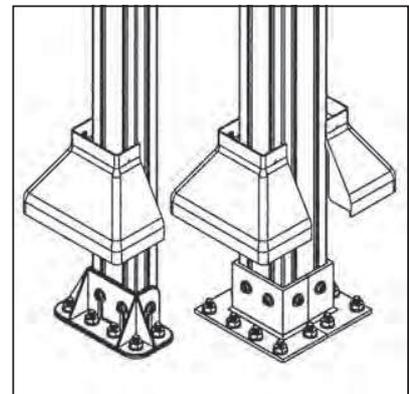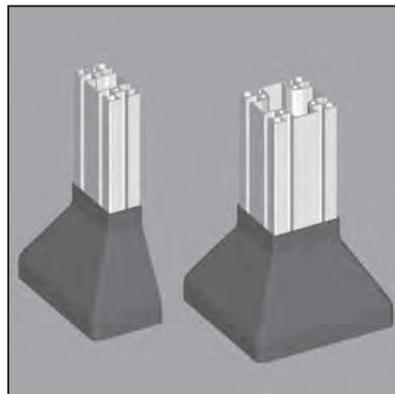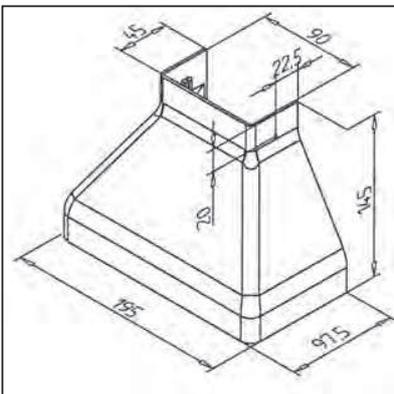

TECHN. DATA / ITEMS SUPPLIED

- ABS, grey
- Weight 0,131 kg

APPLICATIONS



- Suitable for foot 90 GD and 90 S
- Less dust and dirt deposit on the foot
- Easy to clean

ASSEMBLY

- Expand the cover manually and clip in the slots of the profile
- Push the cover downwards
- Laterally fix with self tapping screw 3,4 x 16; in addition drill $\varnothing 2,5$ on the marked place

CLAMP FOR TRANSPORTATION

part no. 26.1101/0

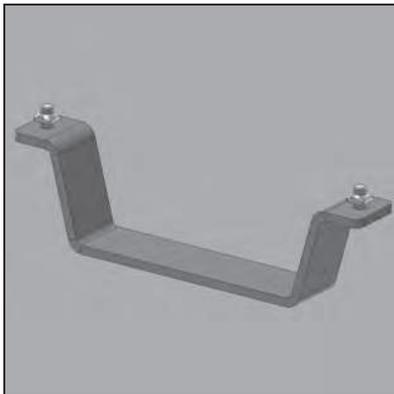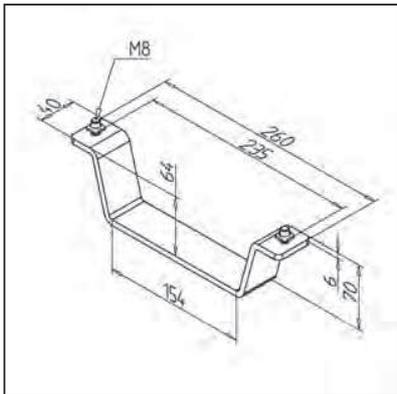

TECHN. DATA / ITEMS SUPPLIED

- 1 clamp
- Steel, zinc-plated
- Fastening kit
- Weight 0,708 kg

APPLICATIONS

- For fixation of goods during transport with forklift

ASSEMBLY

- Fastening on bottom side of construction with fastening kit
- Use always in pairs



Profilex s.a.

6b, Z.I. In den Allern
 L-9911 Troisvierges
 Phone LU : +352 99 89 06
 Phone BE : +32 28 88 16 29
 Fax : +352 26 95 73 73

info@profilex-systems.com
www.profilex-systems.com